


Ceiling Module | Rocker Switch MR-2 by Canal

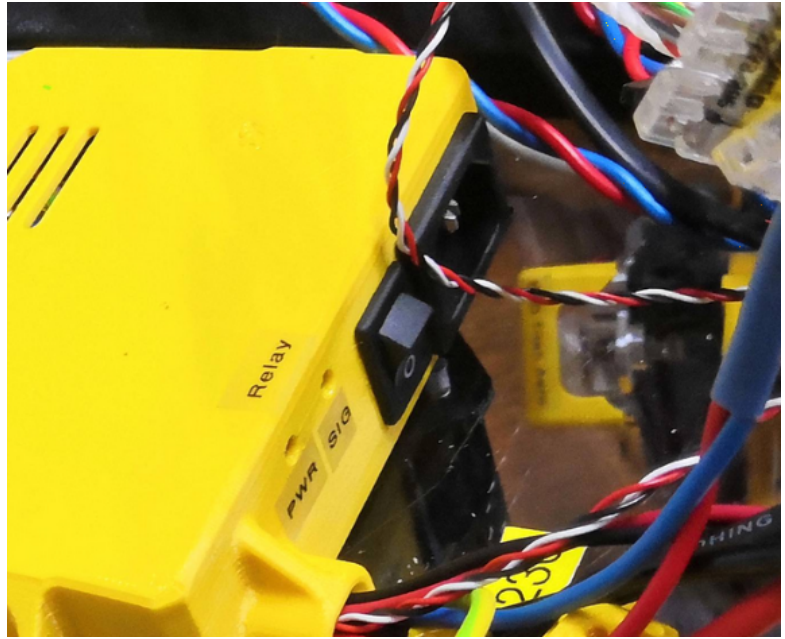

- 10A 125VAC (UL, CUL)
- 6A 250VAC(UL, CUL)
- 10(4)A 250V~ T125/55 (VDE,ENEC))
- Snaps into 13 x 19mm panel
- Initial contact resistance : 20m ohm (max.)
- Insulation resistance : 100M ohm (min,) at 500VDC
- Dielectric strength : 1,000VAC for 1 minute
- Electrical life : 10,000 cycles
- Switch for Class II appliances
- Base : Nylon 66, UL rated 94V-2 min
- Actuator : PBT / Nylon 66, UL rated 94V-2 min
- Spring : Piano wire
- Contact : Silver alloy
- Terminals: Silver plated Copper, soldering, quick connecting and PCB terminals offered
- Approvals: ENEC, VDE, CQC, UL

This switch was ripped off from an old power supply and is used to turn on/off power manually at the Meanwell PSU ([Switching Power Supply MW RSP-320-24](#)).

Version #1

Erstellt: 2026-06-07 23:15:55 CEST von Mario Voigt

Zuletzt aktualisiert: 2026-06-07 23:16:17 CEST von Mario Voigt