
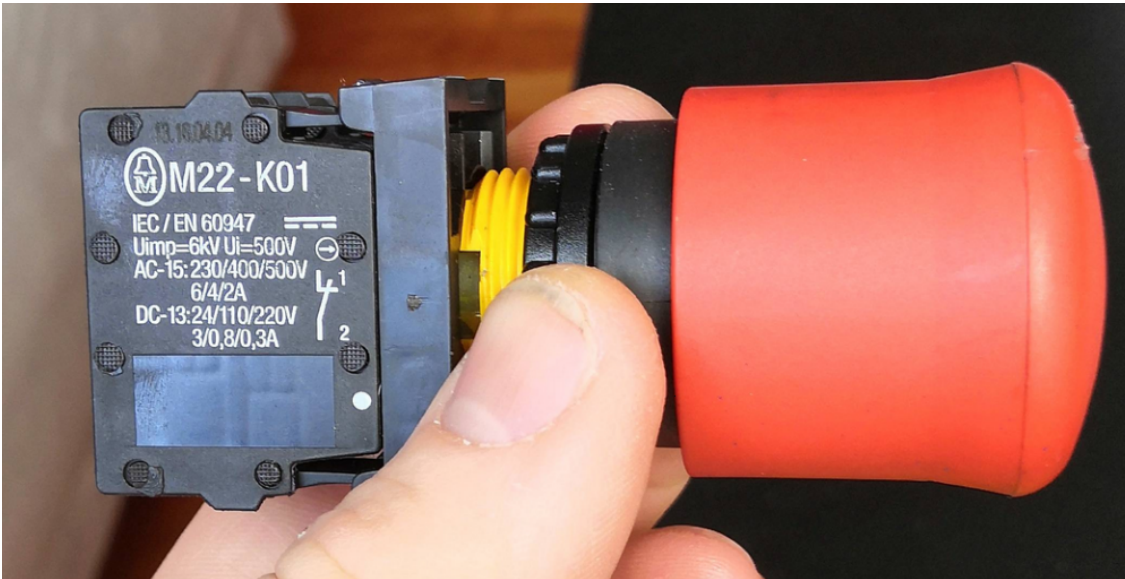


Generic used parts and base frame parts |
Emergency push button and opener M22-
K01 by Eaton

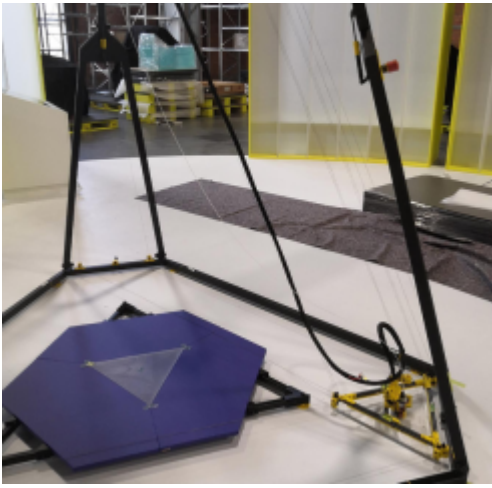

<https://wiki.stadtfabrikanten.org/pdfjs/web/viewer.html?file=https://wiki.stadtfabrikanten.org/attachments/127>

<https://wiki.stadtfabrikanten.org/pdfjs/web/viewer.html?file=https://wiki.stadtfabrikanten.org/attachments/128>

- Cross sections: 1 x (0.75 - 2.5) 2 x (0.75 - 2.5) mm²
- Rated insulation voltage [Ui]: 500 V Rated impulse withstand voltage [Uimp]: 6000 V AC
- Operating torque (screw terminals): ≤ 0.8 Nm
- Climate resistance: moist heat, constant, according to IEC 60068-2-78 moist heat, cyclic, according to IEC 60068-2-30
- Ambient temperature: -25 - +70 ° C
- Overvoltage category / degree of pollution: III / 3
- Execution of the electrical connection: screw connection
- Operating frequency [switching cycles / h]: ≤ 3600
- Operating force: ≤ 5 N
- Max. Short-circuit protection device: 10 A
- Contact type: NC contact
- Switching voltage: 220 V / DC
- Switching current (max.): 2 A
- Degree of protection: IP20
- Min. Temperature: -25 ° C
- Max. Temperature: +70 ° C
- Mechanical life: 5 x 10⁶ cycles
- Electrical life: 1.2 x 10⁶ cycles
- Mounting type: front mounting
- Product type: contact element

Version #1

Erstellt: 2026-06-07 22:56:45 CEST von Mario Voigt

Zuletzt aktualisiert: 2026-06-07 22:58:24 CEST von Mario Voigt