


Import Attributes

Imports attribute values from given text file. Lines in the file must be in format `elementId,attributeName,value`. Malformed ids will be skipped (you will get a warning).

Get the items you want to modify

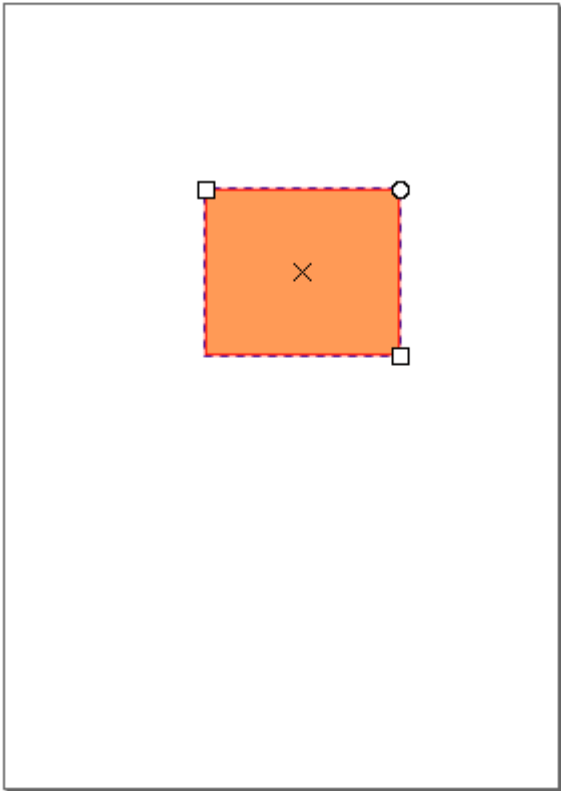

```
<svg:svg id="svg6">
  <svg:defs id="defs2">
    <sodipodi:namedview id="base">
  <svg:g id="layer1" inkscape:label="Layer 1">
    <svg:rect id="rect823">
```


Click to select nodes, drag to rearrange.

+	Name	Value
⊗	y	70.303574
⊗	x	76.351196
⊗	height	62.744045
⊗	width	73.327377
⊗	id	rect823
⊗	style	opacity:0.99;fill:#ff99...


Run the extension

Select the file you want to import data from. Example: `C:\Users\test\Desktop\test.txt`

```
rect823,y,30  
rect823,x,30  
rect823,width,130  
rect823,height,130
```

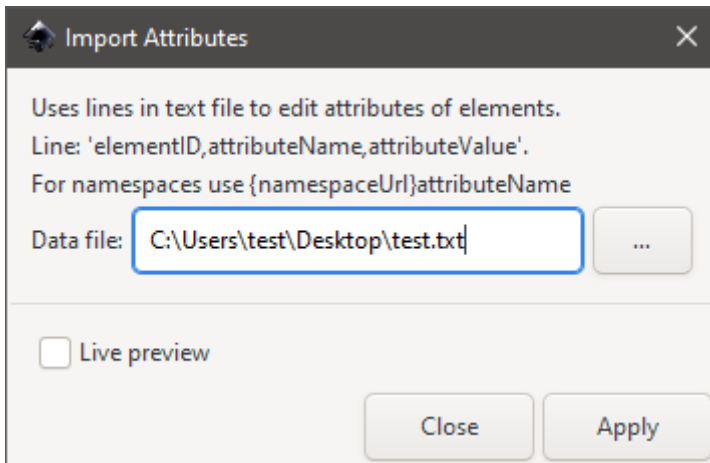

Check the XML tree for changed values

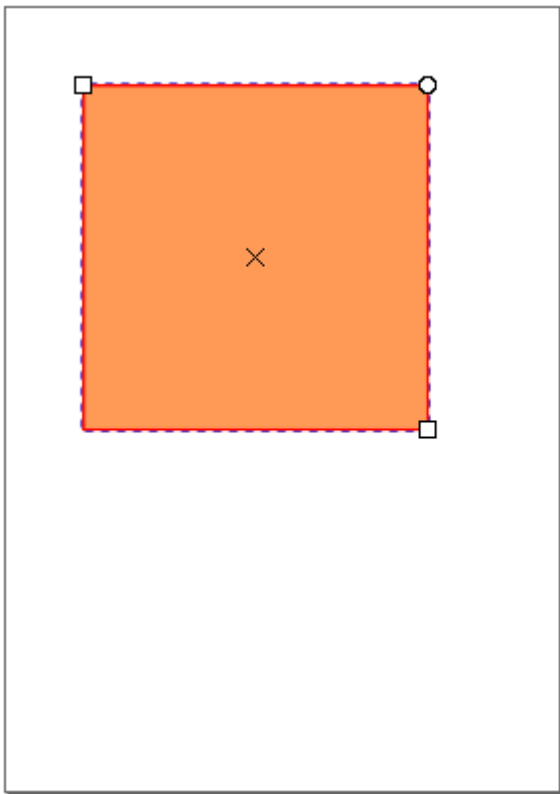

Click to select nodes, drag to rearrange.

	Name	Value
⊗	y	30
⊗	x	30
⊗	height	130
⊗	width	130
⊗	id	rect823
⊗	style	opacity:0.99;fill:#ff99...

Zuletzt aktualisiert: 2025-05-24 16:25:49 CEST von Mario Voigt